# CDS<sup>®</sup>

## **COMPUTE-A-CHARGE®**

# **CC220W, CC240W**Wireless Refrigerant Charging Scales

For use with free app featuring CPS®Link™ US Patent No. 9,043,161. For Android (Version 4.3 or higher) or iOS mobile devices.













### **OWNER'S MANUAL** (English)

Français, Español, Deutsch, Português, Русский,日本語 and latest updates: www.cpsproducts.com



TO BE OPERATED BY QUALIFIED PERSONNEL ONLY

#### DESCRIPTION

CPS® Compute-a-Charge wireless refrigerant scales are battery-operated and designed to accurately and reliably weigh, charge and recover refrigerants when connected to your personal mobile device using patented CPS Link™ wireless technology. The free Scale Link™ app includes Tank Tracker™, a complete tank and refrigerant management system, along with other features to easily input and access jobs, customer information and more. Available in two platform sizes, both models are compact in size but have large weight capacities.

#### **KEY FEATURES**

#### CPS Link™ Wireless Connection

- Key controlling functions and readouts are conveniently located in your mobile device
- Advanced communication software ensures uninterrupted connectivity between mobile device and scale
- Operates in ISM band for international use

#### Easily input or access:

- Job data (name, client, invoice #)
- Client list (name, address, e-mail, phone)
- Custom alarms for charge and recover
- · E-mail customer and job information
- Convenient Tank Tracker<sup>™</sup> tank management system to monitor refrigerant use (supply, recovery and refrigerant type)
- Job checklist to quickly note job site findings
- Geographic weight correction
- Cloud storage of your data using a CPS Link<sup>™</sup> account

#### Scale Highlights:

- Accommodates a wide range of cylinder sizes and weights, up to 220 lb (100 kg) for CC220W or 240 lb (110 kg) for CC240W
- Corner adjusted heavy duty load cell.
- Full electronic and mechanical overload protection
- Best-in-class accuracy: 0.05% of reading or 0.25 oz./(± 5 g) whichever is greater
- High resolution: 0.25 oz./(± 5 g) through the entire range
- Calibrated to strict NIST standards
- Continuous operation Up to 75 hours (with included batteries)
- Insulating rubber top platform mat
- Indoor/outdoor use

#### **SCALE LAYOUT**



#### **GENERAL SAFETY INSTRUCTIONS**

Please read, follow and understand the contents of this entire manual, with special attention given to **Danger**, **Warning** and **Caution** statements.

FOR USE BY PROFESSIONALLY TRAINED AND CERTIFIED OPERATORS ONLY. MOST STATES, COUNTRIES, ETC., MAY REQUIRE USER TO BE LICENSED. PLEASE CHECK WITH YOUR LOCAL GOVERNMENT AGENCY.

**DANGER:** Overfilling a recovery tank may cause a violent rupture resulting in severe

injury or even death. As a minimum, please use a scale to continuously

monitor recovery tank weight.

**WARNING:** All hoses may contain liquid refrigerant under pressure. Contact with refrigerant

may cause frostbite or other related injuries. Wear proper personal protective equipment such as safety goggles and gloves. When disconnecting any hose, please use extreme caution as high pressure refrigerant may be present.

**WARNING:** Avoid breathing refrigerant vapors and lubricant vapor or mist. Breathing high

concentration levels may cause heart arrhythmia, loss of consciousness, or even cause suffocation. Exposure may irritate eyes, nose, throat and skin. Please read manufacturer's Material Safety Data Sheet for further safety

information on refrigerants and lubricants.

**WARNING**: Make certain all safety devices are functioning properly before operating

equipment.

**CAUTION:** To avoid cross contamination of refrigerant and potential leakage to the

atmosphere, proper hoses and fittings should be used and checked for damage.

**CAUTION:** To avoid overfilling refrigerant tank, read and follow manufacturer's

recommended filling instructions for refrigerant being recovered.

**CAUTION:** Mixing of different refrigerants will cause your recovered supply of refrigerant to

become contaminated.









#### SPECIFICATIONS

	CC220W	CC240W
Capacity:	220 lb (100 kg)	240 lb (110 kg)
Accuracy:	0.05% of reading or 0.25 oz./(± 5 g) whichever is greater	
Resolution:	$0.25 \text{ oz.} / (\pm 5 \text{ g})$ through the entire range	
Overload Protection:	Full electronic and mechanical	
Power:	4 AA alkaline (included)	
Battery Life (Continuous On):	Up to 75 hours	
Operating Temperature Range:	14°F to 122°F (-10°C to 50°C)	
Scale to mobile device range:	30 ft.	
Operating Humidity Range:	0 to 95% non-condensing	
Platform Dimensions:	2" x 8.75" x 8.75" (5 cm x 22 cm x 22 cm)	2" x 10" x 10" (5 cm x 25 cm x 25 cm)
Maximum Cylinder Footring:	11.5" (29 cm)	12.75" (32 cm)
Protective Case Dimensions	Soft Case 9.75" x 10" x 3" (8 cm x 35 cm x 40 cm)	Hard Case 13.625" x 15.625" x 2.625" (35 cm x 40 cm x 7 cm)
Combined Weight (Scale & Case):	5.35 lb (2.4 kg)	8.64 lbs (3.9 kg)
Serial # / Radio I.D. #	See label on scale underside	

#### **QUICK START INSTRUCTIONS**

- 1. Review and adhere to all safety instructions.
- 2. Remove scale from case and place on a level, rigid surface.
- 3. Remove 2 screws that attach battery door.
- 4. Install (4) AA alkaline batteries (included).
- 5. Replace battery door.
- Scan the appropriate QR code from this front cover or download and install the free CPS Scale Link™ app for your wireless Compute-a-Charge® scales:



For iOS devices - Download the free CPS Scale Link™ app from the App Store.

For Android devices (version 4.3 or higher)


- Download the free CPS Scale Link™ app from Google Play. Note: Earlier versions of Android software do not use 'low energy' communication device necessary to install and run the app.



Link

- 7. Open the Scale Link app, and after a brief walk through, you will be in the Link view where the app scans for Wireless Compute A Charge scales in range
- 8. If there are multiple CPS wireless scales in range, select **ONE** (see scale base for serial/radio I.D. number) from the Link Screen on your mobile device (example shown above).
- Connect equipment as shown in Diagram A or Diagram B. If you don't intend to use the Tank Tracker™ (tank management feature), you are ready to use the Compute-A-Charge scale. To use Tank Tracker™, see page 9 for more information.
- 10. You are now ready to work.

#### **CONNECT EQUIPMENT AS SHOWN**








Diagram A (Charge)

Diagram B (Recover)

#### **HOME SCREEN LAYOUT**

The **HOME SCREEN** is displayed once the app is communicating with your scale. **LINK** screen (page 4) is displayed if mobile device is **NOT** communicating with the scale.

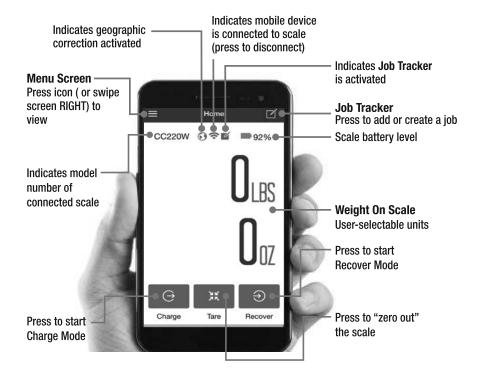

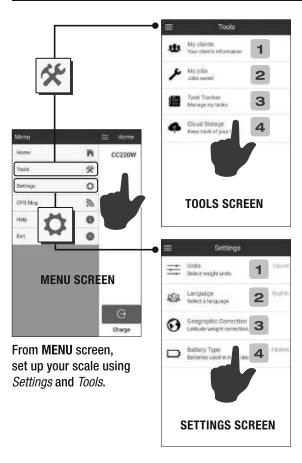


- 1 My clients: Build a data base of your clients and their contact information\*
- 2 My jobs: Keep track of job name, client name and invoices\*
- 3 Tank Tracker™: Input and store information on your inventory of supply and recovery tanks\* Track refrigerant use
- 4 Cloud Storage: As back up to mobile device, store data in the cloud

\*You can conveniently e-mail this information.

- 1 Units: Select kg and g or lb and oz
- 2 Language: Select among one of seven supported languages
- 3 Geographic Correction: To obtain additional global weight accuracy, go to: Settings; Location
- **4 Battery Type:** Specify batteries used in your scale for better projection of battery life


#### **JOB CHECKLIST**






Quickly record job-site findings. Conveniently e-mail to homeowner or head office for follow-up business, future reference, etc.

#### **CHARGE (WITHOUT TANK TRACKER™)**

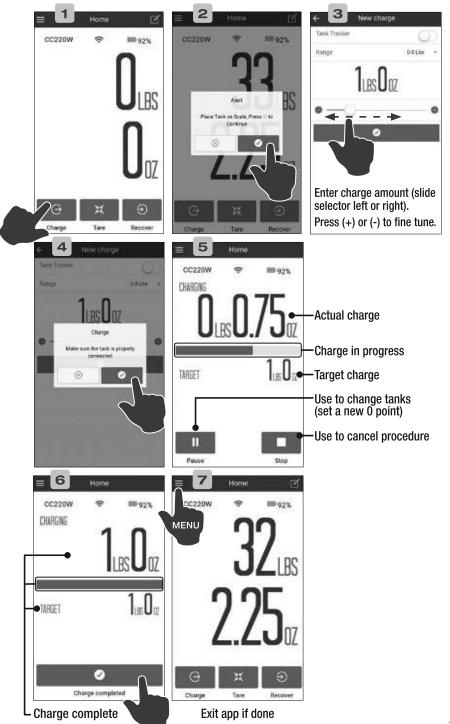


#### RECOVER (WITHOUT TANK TRACKER™)
















Exit app if done


#### TANK TRACKER™ SETUP (SUPPLY OR RECOVERY)

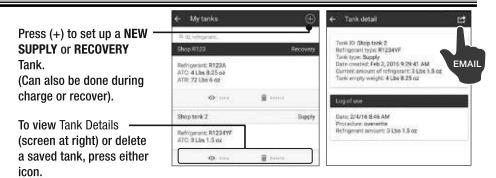

#### **SETUP NEW SUPPLY TANK**

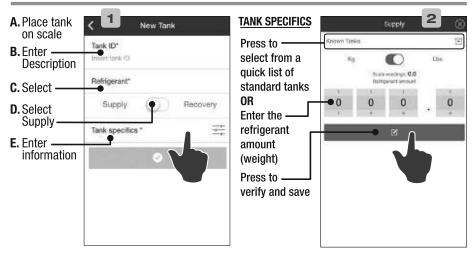


#### SETUP NEW RECOVERY TANK

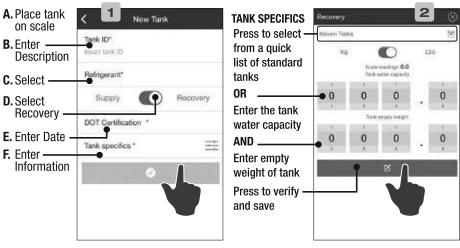

#### **CHARGE (WITH TANK TRACKER™)**


















Exit app if done

#### RECOVER (WITH TANK TRACKER™)





2

CC220W


ED 92%











Exit app if done

#### **APPENDIX A (BATTERY)**

\*Scale Battery Level: When the scale and mobile device wirelessly connect, the scale's battery usage is displayed on the app (See HOME screen). CPS recommends replacing the scale battery with fresh AA batteries when the battery reading falls below 7%, although useful operation can be obtained with battery voltages as low as 3%. Low Battery Indication: When a low battery condition exists, the scale will turn itself off in a safe condition. Scale/Mobile Device Connection: If CPS® Compute-a-Charge® wireless scales have difficulty maintaining connectivity, no response to entries, etc. the most probable cause is a low battery, or your mobile device may be more than 30 ft. from scale.

#### APPENDIX B (DECLARATION OF CONFORMITY) In accordance with EN 45014

EN 61326:2013	Electrical Equipment for Measurement, Control and Laboratory Use – EMC Requirements	
214 EN 55011	Industrial, Scientific & Medical, Class A Emissions Testing	
303 EN 61000-4-2	Electrostatic Discharge, Immunity Testing	
304 EN 61000-4-3	Radiated Electromagnetic Fields, Immunity Testing	

#### APPENDIX C (CERTIFICATE OF CALIBRATION COMPLIANCE)

CPS Compute-a-Charge® Wireless Refrigerant Charging Scales have been individually calibrated to respond to the published minimum accuracy levels using one of the following NIST traceable standards:

- Class F 50 lb weight S/N's TP3060, 7816, 0J0H
- Class F 100 lb weight S/N's 2390, 1QNZ

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules and Industry Canada ICES-003. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

CAN ICES-3 (A)/NMB-3(A)

#### WARRANTY

CPS Products, Inc. guarantees that all products are free of manufacturing and material defects to the original owner for one year from the date of purchase. If the equipment should fail during the guarantee period it will be repaired or replaced (at our option) at no charge. This guarantee does not apply to equipment that has been altered, misused or solely in need of field service maintenance. All repaired equipment will carry an independent 90 day warranty. This repair policy does not include equipment that is determined to be beyond economical repair.

#### **LOCATIONS**

CPS PRODUCTS, INC. U.S.A. 1010 East 31st Street Hialeah, Florida 33013 USA Tel: 305-687-4121, 1-800-277-3808 Fax: 305-687-3743 info@cpsproducts.com www.cpsproducts.com

CPS PRODUCTS
CANADA LTD.
1324 Blundell Road
Mississauga, ON, L4Y 1M5
Tel: 905.615.8620,
Fax: 905.615.9745
info@cpsproducts.com
www.cpsproducts.com

CPS PRODUCTS N.V Krijgsbaan 241, 2070 Zwijndrecht, Belgium Tel: (323) 281 30 40 Fax: (323) 281 65 83 info@cpsproducts.be CPS AUSTRALIA PTY. LTD. 109 Welland Avenue Welland, South Australia 5007 Tel: +61 8 8340 7055, Fax: +61 8 8340 7033 sales@cpsaustralia.com.au