



AIRFLOW & ENVIRONMENTAL METER

ABM-200

The ABM-200 Airflow & Environmental Meter is a small, portable, wireless smart tool that, when paired with a smart phone or tablet running the latest CPS Link, can measure, record and e mail a variety of indoor/outdoor temperature, humidity, airflow or pressure conditions taken at residential or commercial job sites.

KEY FEATURES:

- On screen guidance to accurately measure and record test data:
 - Temperature differential, dry bulb, wet bulb and feels like temperatures
 - Airflow velocity and volume
 - Relative humidity, dew point
 - Barometric pressure, air density
 - Indoor/outdoor conditions
 - Wind speed/direction/gusts
- Test And Balance Report- Automatically generated from data collected.
- E-mail professional reports for work completed, and where located
- Client Lists - Easy to enter and retain client contact information
- Cloud back up of data

Ways to attach ABM-200 to gather airflow and environmental data




Mount inside
ABM EasyHood



Attach to
smartphone



Attach to grille



Mount on EXP-64
extension pole
(sold separately)



Mount on TRI-MINI
tripod (sold separately)

Data Displayed In Current
Conditions Screen



CPS Global Headquarters

1010 East 31st Street Hialeah, Florida 33013 USA www.cpsproducts.com
For more information call: In the U.S.A. (800) 277-3808 or (305) 687-4121
In Canada (905)358-3124 In Europe 323 281 30 40 In Australia 61 8 8340 7055



Connect with us on social media

CPS reserves the right to make changes to, or discontinue any product or service identified in this publication without notice. CPS advises its customers to ensure they have obtained the latest and most current version of any relevant information before placing any orders. © CPS Products, Inc. All rights reserved.

**ABM-200****SPECIFICATIONS**

Wireless Connection Range	≤100 ft. (30.5 m)
Airflow Volume	Range: 35-1200 CFM (59-2,038 M ³ /H)
Velocity	Range: 44-12,320 fpm (13 - 3,755 mpm) Accuracy: ±0.5%
Pressure (mbar)	Range: 300-1100 Accuracy: ±0.12 mbar
RH	Range: 0-85% Accuracy: ±4%
Temperature	Range: 0 °F to 140 °F (-18 °C to 60 °C) Accuracy: ±0.7 °F (0.4 °C)
Bluetooth Smart	✓
Auto Power Off	No connection or 30 sec after closing app
Battery Type	3.0V CR2450 coin cell lithium (remove/reinstall rubber skin to access battery compartment)
Battery Life	> 500 hrs.
CPS Link	Patented modular test and measurement system technology (US Patent No. 9,043,161)
Warranty	1 Year

**CONDITIONS MEASURED FOR INDOOR
OR OUTDOOR TESTS**

Environmental Condition	Outdoor Test	Indoor Test
Dry Bulb	✓	✓
Wet Bulb	✓	✓
Feels Like	✓	✓
Relative Humidity	✓	✓
Dew Point	✓	✓
Barometric Pressure	✓	✓
Air Density	✓	✓
Wind Speed	✓	
Wind Direction	✓	
Maximum Wind Gust	✓	

EASY ON-SCREEN GUIDANCE TO RECEIVE, STORE & SEND DATA


ABM-200 packed in
clamshell (included)

FREE CPS LINK™ APP DOWNLOAD


iPhone 4S or newer.




Version 4.3 or higher

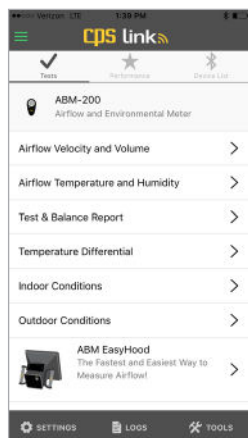

List of tests to select from

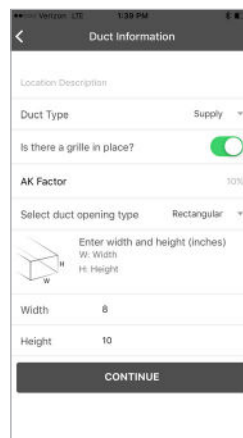


Enter duct information

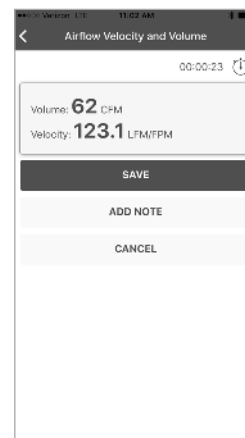


Airflow Velocity and
Volume test data



Airflow Temperature and
Humidity test data

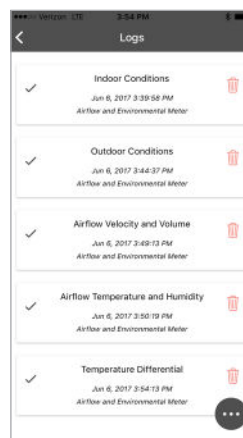

Log of completed tests

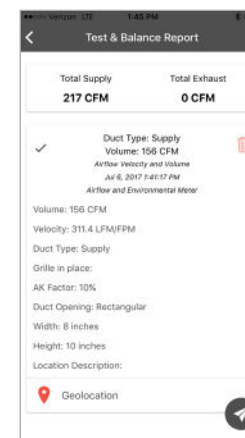

Test & Balance report

PACKAGING

	CLAMSHELL				INTERMEDIATE CARTON				MASTER CARTON			
	L x W x H	Weight	Meter Qty	Bar Code	L x W x H	Weight	Meter Qty	Bar Code	L x W x H	Weight	Meter Qty	Bar Code
ABM-200	5.00 x 2.40 x 1.00 inches (127 x 61 25 mm)	0.22 lb 0.10 kg	1	850470006022	7.00 x 5.80 x 5.80 inches (178 x 147 x 147 mm)	2.93 lb 1.33 kg	12	30850470006023 ABM-200-C	12.60 x 7.70 x 12.70 inches (320 x 196 x 323 mm)	12.00 lb 5.44 kg	48	20850470006026 ABM-200-MC